

# Smart Module

## Monocrystalline PERC Module with Half-Cut Cell Technology and Integrated Power Optimizer

SPV370-R60JWMG, SPV375-R60JWMG

SMART MODULE



### PV to grid solution including full service from SolarEdge

- 25-year module warranty and 25-year performance warranty
- Easy installation with module pre-assembled power optimizer
- Optimized energy output by constantly tracking the maximum power point (MPPT) of each module individually
- Module-level voltage shutdown for installer and firefighter safety
- Full visibility of system performance from module to grid
- Superior quality control with full automatic production line
- Excellent mechanical loading and shock resistance performance
- Detects abnormal PV connector behavior, preventing potential safety issues
- Specifically designed to work with SolarEdge inverters
- Faster installations with simplified cable management and easy assembly using a single bolt

# Smart Module


## SPV370-R60JWMG, SPV375-R60JWMG

### MODULE ELECTRICAL PROPERTIES

STC <sup>(1)</sup>	SPV370-R60JWMG	SPV375-R60JWMG	
Module Power	370	375	W
Max. Power Voltage (Vmp)	34.08	34.28	V
Max. Power Current (Imp)	10.86	10.95	A
Open Circuit Voltage (Voc)	41.30	41.50	V
Short Circuit Current (Isc)	11.37	11.46	A
Maximum System Voltage		1500	Vdc
Maximum Series Fuse Rating		20	A
Module Efficiency	20.31	20.59	%
NMOT <sup>(2)</sup>			
Module Power	278.5	282.2	W
Max. Power Voltage (Vmp)	32.05	32.22	V
Max. Power Current (Imp)	8.69	8.76	A
Open Circuit Voltage (Voc)	38.99	39.18	V
Short Circuit Current (Isc)	9.15	9.23	A
Measurement Tolerance		±3%	Pmax
		±3%	Voc
		±5%	Isc

### MODULE MECHANICAL PROPERTIES

Cells	120 (6 x 20)	
Cell Type	Monocrystalline PERC	
Cell Dimensions	166 x 83	mm
Dimensions (L x W x H)	1755 x 1038 x 35	mm
Front Side Maximum Load (Snow)	5400	Pa
Rear Side Maximum Load (Wind)	2400	Pa
Weight (with Power Optimizer)	20.2	kg
Front Glass	3.2mm, coated tempered glass	
Frame	Black anodized aluminum	
Junction Box	IP68, three diodes	
Connector Type	MC4 EVO2	
Operating Temperature	-40 to +85	°C
Packaging Information (units per pallet)	31	

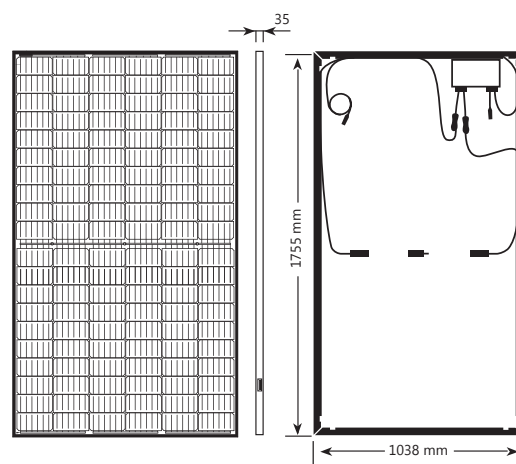

### CERTIFICATIONS & WARRANTY

Module Certifications	IEC61215:2016, IEC61730:2016, AU listing CEC, Ammonia, PID, Salt-mist
Product Warranty	Power Optimizer — 25-year warranty, Module — 25-year warranty
Output Warranty of Pmax	25-year linear module warranty <sup>(3)</sup>

### TEMPERATURE CHARACTERISTICS


Temperature Coefficient Power (Pm)	-0.37	% / °C
Temperature Coefficient Voltage (Voc)	-0.29	% / °C
Temperature Coefficient Current (Isc)	0.04	% / °C
Operating Cell Temperature (NOCT)	43 ± 2	°C

(1) STC: Irradiance 1000 W/m<sup>2</sup>, Cell Temperature 25°C, Air Mass AM1.5


(2) NMOT: Irradiance at 800 W/m<sup>2</sup>, Ambient Temperature 20°C, Wind Speed 1 m/s

(3) 1st year: 97.5%, 83.1% power output over 25 years

**Linear Warranty**  
25-Year Product Warranty  
+ 25-Year Linear Power Warranty

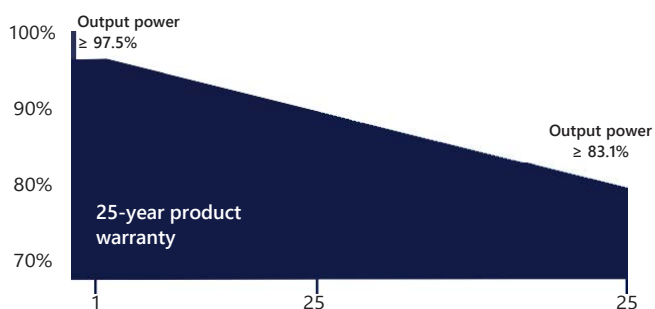

### Panel I-V Curve (SPV370-R60JWMG)

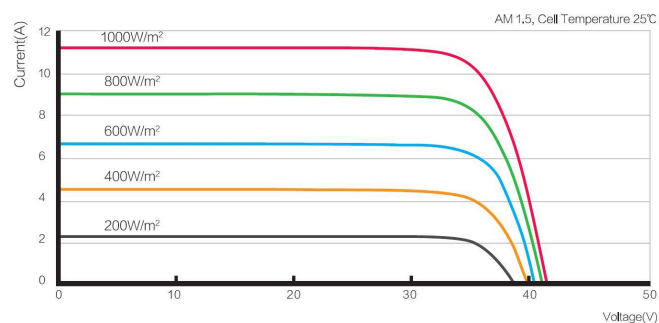

# Smart Module

## SPV370-R60JWMG, SPV375-R60JWMG

	S440	UNIT
<b>INPUT</b>		
Rated Input DC Power <sup>(1)</sup>	440	W
Absolute Maximum Input Voltage (Voc)	60	Vdc
MPPT Operating Range	8 - 60	Vdc
Maximum Short Circuit Current (Isc) of Connected PV Module	14.5	Adc
Maximum Efficiency	99.5	%
Weighted Efficiency	98.6	%
Oversoltage Category	II	
<b>OUTPUT DURING OPERATION</b>		
Maximum Output Current	15	Adc
Maximum Output Voltage	60	Vdc
<b>OUTPUT DURING STANDBY (POWER OPTIMIZER DISCONNECTED FROM INVERTER OR INVERTER OFF)</b>		
Safety Output Voltage per Power Optimizer	1	Vdc
<b>STANDARD COMPLIANCE</b>		
EMC	FCC Part 15 Class B, IEC61000-6-2, IEC61000-6-3	
Safety	IEC62109-1 (class II safety), UL1741	
Material	UL94 V-0, UV Resistant	
RoHS	Yes	
Fire Safety	VDE-AR-E 2100-712:2013-05	
<b>INSTALLATION SPECIFICATIONS</b>		
Maximum Allowed System Voltage	1000	Vdc
Dimensions (W x L x H)	129 x 153 x 30	mm
Weight (including cables)	655 / 1.5	gr / lb
Input Connector	MC4 <sup>(2)</sup>	
Input Wire Length	0.1	m
Output Connector	MC4	
Output Wire Length	(+) 2.3, (-) 0.10	m
Operating Temperature Range <sup>(3)</sup>	-40 to +85	°C
Protection Rating	IP68 / NEMA6P	
Relative Humidity	0 - 100	%

(1) Rated power of the module at STC will not exceed the power optimizer Rated Input DC Power. Modules with up to +5% power tolerance are allowed

(2) For other connector types please contact SolarEdge

(3) For ambient temperature above +70°C / +158°F power de-rating is applied. Refer to Power Optimizers Temperature De-Rating Technical Note for more details

PV System Design Using a SolarEdge Inverter		Single Phase HD-Wave	Single Phase	Three Phase	Three Phase for 277/480V grid
Minimum String Length (Power Optimizers)	S440	8		16	18
Maximum String Length (Power Optimizers)		25		50	
Maximum Nominal Power per String <sup>(4)</sup>		5700	5250	11250 <sup>(5)</sup>	12750 <sup>(6)</sup>
Parallel Strings of Different Lengths or Orientations				Yes	

(4) If the inverters rated AC power ≤ maximum nominal power per string, then the maximum power per string will be able to reach up to the inverters maximum input DC power

Refer to: <https://www.solaredge.com/sites/default/files/se-power-optimizer-single-string-design-application-note.pdf>

(5) For the 230/400V grid: it is allowed to install up to 13,500W per string when the maximum power difference between each string is 2,000W

(6) For the 277/480V grid: it is allowed to install up to 15,000W per string when the maximum power difference between each string is 2,000W

(7) It is not allowed to mix S-series and P-series power optimizers in new installations

